

Descrizione / *Description* / *Description*

Flussometro elettronico ad incasso per installazione a parete

Concealed wall-mounted electronic flush valve

Robinet de chasse électronique encastrable pour installation mural

Materiali / *Materials* / *Matériels*

Componenti in finitura
Finishing components
Components en finision

Acciaio Inox/*Stainless steel*/Acier inoxydable

Componenti torniti
Machined components
Composants tournés

Ottone/*Brass/Laiton*

Guarnizioni
Gaskets
Joints

EPDM

Componenti plastica
Plastic components
Composants en
plastique

POM

Finitura superficiale
Surface finishing
Finition de la surface

Conforme/According/Conformément EN 248

In accordo alla EN 9227 in merito all'aggressione salina
According to EN 9227 regarding saline aggression
Conformément à la norme EN9227 concernant l'agression saline

Caratteristiche flussometri con sensore IR
Features flush valve with IR sensor
Comprend des robinet de chasse avec capteur IR

Distanza di esercizio <i>Operating distance</i> <i>Distance de fonctionnement</i>	0.5-70	Cm
Tempo di apertura <i>Opening time</i> <i>Temps d'ouverture</i>	5	sec
Rilevamento presenza <i>Presence detection</i> <i>Détection de présence</i>	7	sec

Caratteristiche / Features



5 - 70 °C




1 l/s (3 bar)


Min 0.5 - Max 6 (*Recommended 2-4*) bar

230/6V DC

Immagine / *Picture* / *Image*

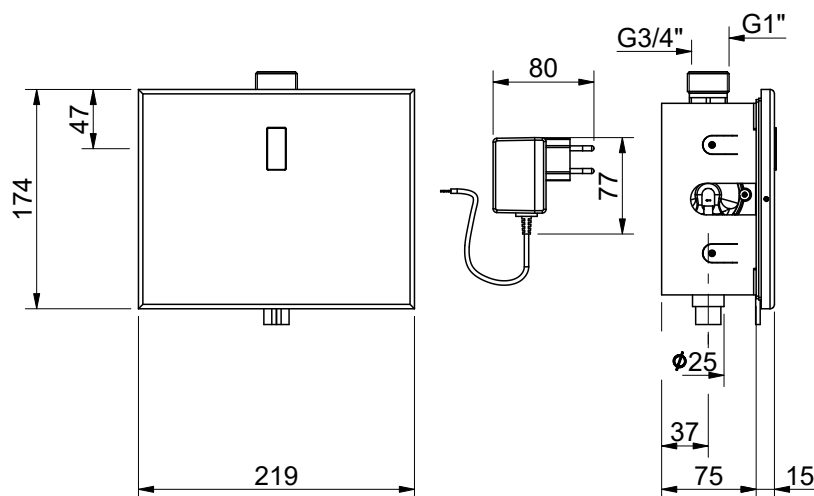

REAR VIEW



RUBINETTERIE MCM Int. S.r.l.
via dell'Acacia, 54/56 - 28021 Borgomanero (NO)
Tel : +39 0322 843060 - Fax : +39 0322 831613
E-mail : info@mcmtaps.it - web : www.mcmtaps.it
P.IVA : IT017877240033



100% Made in Italy



2 Years Warranty



Art.

7015C

1701500R00AL00000

3